

TS III-120-2

Heat Recovery Water Heater Specification Information

Specifications

1. Dual-circuit refrigerant heat exchange plate designed for maximum heat transfer with minimum pressure drop
2. 1-1/8 in. O.D. refrigerant upper inlets and lower outlets
3. Industrial glass lined 114-gallon hot water storage tank
4. 2 in. foam-in-place urethane insulation (R-16)
5. Dual anode protection against corrosion for extended tank life
6. 1-1/4 in. female NPT water inlet
7. 1-1/4 in. female NPT water outlet
8. 150 psi and 210°F pressure/temperature relief valve
9. 6000 watt (240 volt) medium density electric heating element
10. Thermostat to control element (120°-180°F Set point)
11. Thermostat to control 3 way valve or water bleed value (110°-170°F Set point)
12. Attractive enameled galvanized external wrapper
13. Mid-tank 3/4 in. Male NPT connection for recirculating loop return (mid-port)

Overview

The Opti-Stor TS III-120-2 Heat Recovery Water heater features a dual-circuit heat exchanger encompassing a 114-gallon water tank along with a 6 kW electric heating element and controls. Each circuit is compatible with refrigeration loads of up to 10 tons (refer to chart on back page). Larger refrigeration loads can be accommodated by piping the circuits together or considering the Opti-Stor TS III-120-1 unit.

Operation

The Opti-Stor TS III-120-2 heats water by transferring refrigerant superheat to water. Hot gas leaving the compressors is piped through the refrigeration circuits en route to the condensers. The TS III-120-2 is compatible


with any typical refrigeration system within sizing guidelines (using capillary tube systems with the Opti-Stor is normally not recommended). The 6000 watt backup electric element provides additional water heating capacity. Plumbing recirculating loop return water to the mid-port allows recirc line losses to be heated with reclaimed heat without affecting overall heating efficiency. Hot water production depends on the evaporator load (capacity), run time of the compressor and water usage.

Typical Applications

The Opti-Stor TS III-120-2 is ideally suited for heating water in facilities with one or two compressor, mid-sized refrigeration systems. Common installations include:

- Restaurants
- Cafeterias
- Health care facilities
- Walk-in coolers/freezers

Part No. 4016547 – TS III-120-2

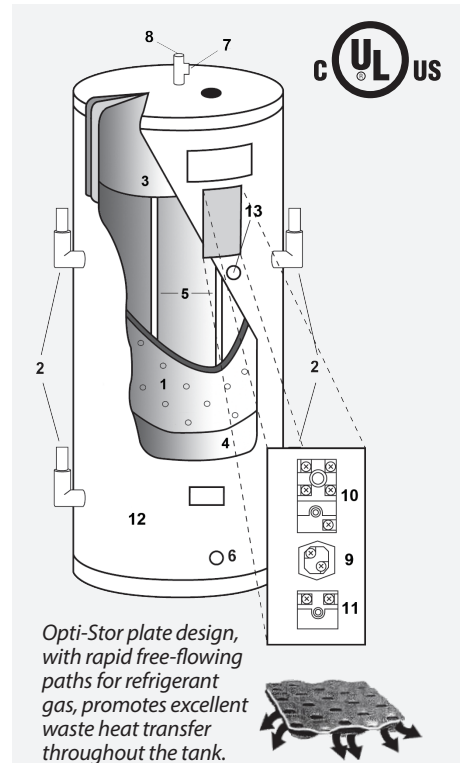

Opti-Stor plate design, with rapid free-flowing paths for refrigerant gas, promotes excellent waste heat transfer throughout the tank.

Unit Specifications

- Tank Dimensions —
Diameter: 28-1/8 in.,
Height: 62-1/4 in.
- Unit Dimensions (with fittings) —
Diameter: 30-3/8 in.,
Height: 67 in., Weight: 433 lbs.
- 120 gallon nominal water capacity
- Max. heat exchange rating 80,000 BTU/hr
- 6000 watt back-up heating element
- 150 psi max. operating water pressure
- Rated for 450 psi refrigerant operating water pressure
- 150 psi maximum operating water pressure
- Double wall vented protection between refrigerant and water

Part No. 4016547 – TS III-120-2

Specifications subject to change without notice.

Certifications

- UL® (SA6294)
- ASHRAE 90

TS III-120-2 | Heat Recovery Water Heater Tank Specification Information

Sizing Guidelines

The Opti-Stor TS III-120-2 can accommodate refrigeration loads of up to 10 tons per circuit depending on refrigerant and evaporator temperatures. The individual circuits can be piped together in parallel to accommodate larger loads (see diagrams below)*. Single circuit units are available with larger refrigeration capacities (Opti-Stor TS III-120-1). Opti-Stor units are not intended as a substitute for air or water cooled condensers. These capacity ratings are based on approximately 15 lb. pressure drop at maximum capacity.

TS III-120-2 Max. Recommended Capacity (in tons) for Typical Refrigeration Systems		
Refrigerant	Low Temperatures	Medium Temperatures
R-22	8.5	10
R-134A	7	8
R-404A, R-502, R-507	6	7

Water Temperature Control

Incorporating provisions in the refrigerant piping to bypass hot gas around the Opti-Stor directly to the condenser is recommended for large capacity systems. This prevents water from overheating during periods of sustained refrigeration operation with no/low water

demand. A typical arrangement incorporates a three-way valve operated by an aquastat that senses water temperature. An alternate arrangement is a water bleed valve that would bleed hot water out of the tank. The TS III-120-2 features a built-in aquastat designed to operate a three-way or water bleed valve. Refer to diagram A below.

Supermarket Applications

In applications with "batch" cleaning, adding a Opti-Stor TS-120 storage tank is recommended. The TS-120 can be installed to accommodate thermal-syphoning (circulating without a pump). See diagram B, refer to Opti-Stor 120 spec sheet for more information. If the Opti-Stor System is installed with a circulating loop, pump the water as slowly as possible and return to the 3/4 in. NPT mid-port. Do not circulate directly between water heater and Opti-Stor unit unless heater has been deactivated so that it acts as storage only.

The Opti-Stor TS III-120-2 units can also be installed in parallel to accommodate larger loads. See diagram C.

**Note: When piping the circuits in parallel, the model TS III-120-2 requires the refrigerant outlets to be piped together at the bottom of the tank, before being piped vertically.*

